

ONE PRODUCT.. ONE DOME/PTZ



RVX28 RVX28-W (wiper)

All X-SERIES cameras can be configured as either conventional Domes or Ball type Pan & Tilts. Cameras are supplied as Domes, but can easily be transformed to Pan & Tilts by removing the Dome Top Cover.

Dome Configuration.

X-series domes all have flat toughened glass windows providing superior optics compared to conventional Dome bubbles. Unlike conventional Domes the X-series Cameras can see above the horizon without the video picture being clipped by the Dome top.

Ball PTZ Configuration.

X-Series Ball PTZ can be inverted and tower mounted. This mounting option provides full 360° vision.



PEDESTAL

SWAN

WALL

PENDANT

Redvision CCTV Ltd, 17 Highview, High Street, Bordon, Hampshire, GU35 0AX, UK

T +44(0)1420 448448 E sales@redvisioncctv.com www.redvisioncctv.com





X-SERIES

RVX28 RVX28-W (wiper)

Key Features

- Cameras supplied as Dome-Easy convert to PTZ
- Rugged Aluminium casting and toughened window
- 0.1/second to 200/second for precise control
- 28X Sony FCB Camera Module
- Up the Coax and 485 control options
- 100 presets, 8 tours, alarm options
- Privacy, 24 programmable zones
- Wiper option available
- Versions available with IR

Specification

Camera Module FCB-EX980EP, 28X module 550 TV lines, Colour/mono TDN.

Mechanical:



Material Powder coat die cast aluminium. Toughened glass window.
 Environment -35°C to +50°C. IP 66.
 Weight 7Kg.

Telemetry:

RS 485 Pelco P, Pelco D, Vista, Dennard.
 Coaxial BBV.

Power Supply Options:

RV-PSU 110-240V input. 24VDC 2A output.
 RV-PSU-ALM16 PSU including 16 alarm inputs.
 RV-PSU-ALM16-W PSU with 16 alarm inputs and wireless PIR interface.

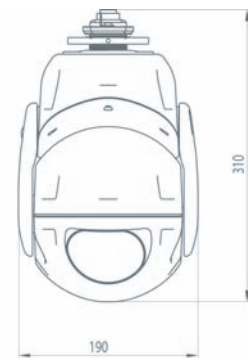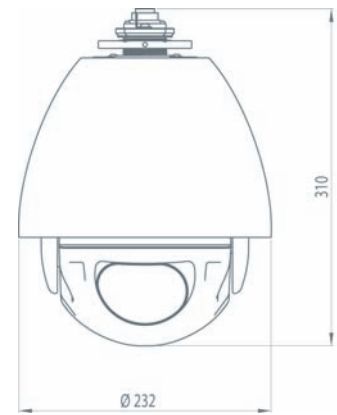

Order Codes

RVX28 X-Series Dome/PTZ Camera.
 RVX28-W X-Series Dome/PTZ Camera with Wiper.

Related Products: RVX18 & RVX18-W

Mounting Bracket Options:



RV-POLE

RV-CNR

RV-SWAN

RV-WALL

RV-PED

Redvision CCTV Ltd, 17 Highview, High Street, Bordon, Hampshire, GU35 0AX, UK

